


HIGHLY WEAR RESISTANT SPECIALIZED COATINGS



DATA SHEET **EURODUR®** **3800**

EURODUR® GmbH | Bahnhofstraße 12 | D - 97717 Euerdorf
Tel. (09704) 91010 | E-Mail: eurodur@eurodur.com

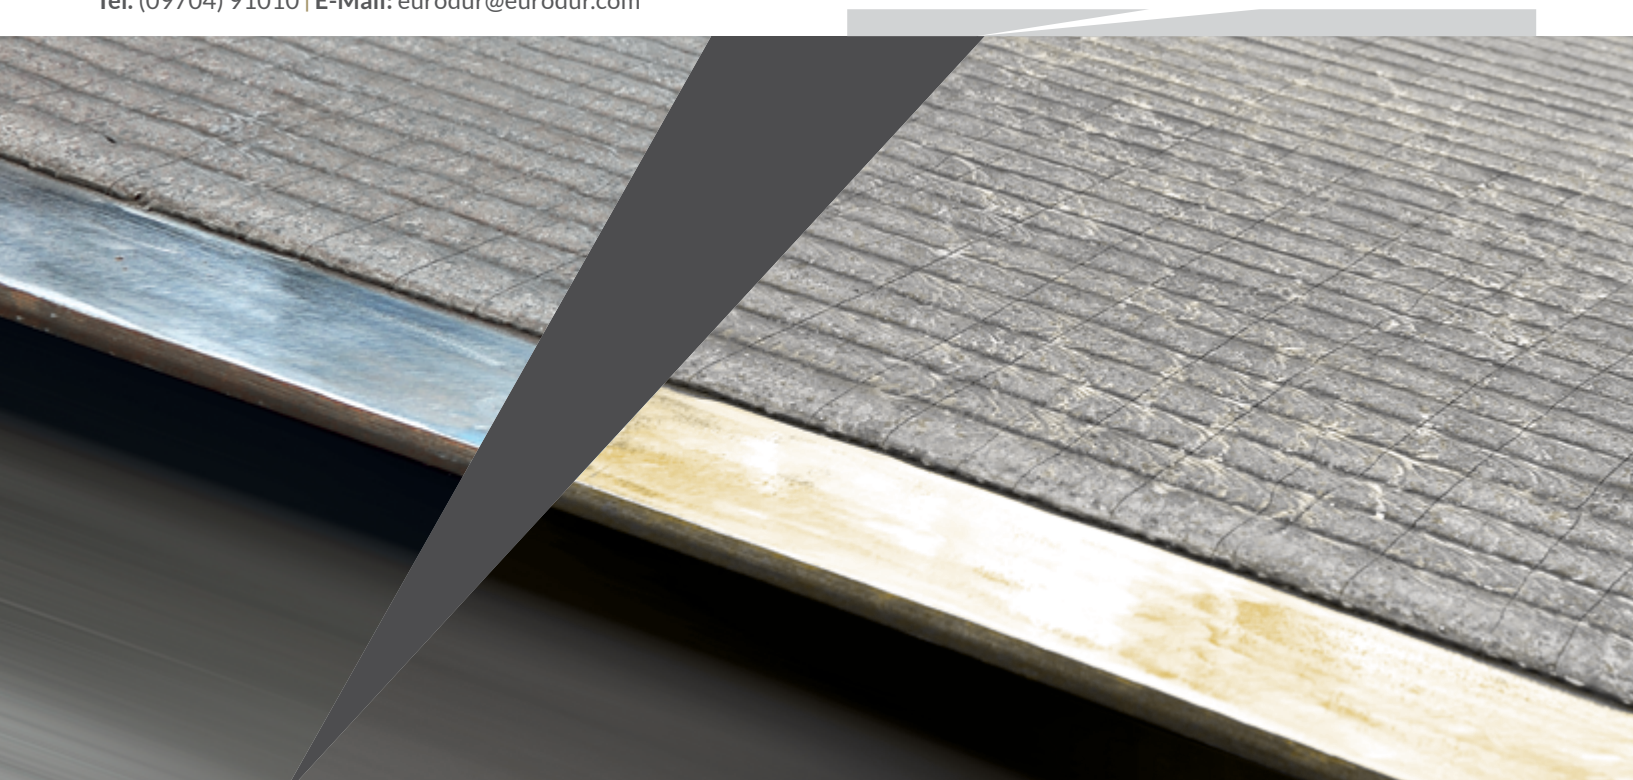

PLANNING & CONSULTING



From consulting and system engineering to the finished product.

QUALIFIED CONSULTANTS



We have the right specialist for every challenge.

CONSTRUCTION & PRODUCTION



Your order is produced with our cutting edge technology in best quality with utmost accurateness.

DELIVERY / ASSEMBLY



Flexible and dependable – including assembly on-site.

EURODUR® always sets focus on innovative products. Constant enhancements are achieved by closely working together with you as our client. Only together your individual needs and challenges can be solved. Hundreds of active EURODUR® clients are able to verify this, especially in the field of cement, mining, steel- and recycling industry.

Every single EURODUR® production facility is equipped with the most advanced technology. Production is computer controlled to reproduce optimum material performance even with varying material thickness. Our intense research work lead us (for instance) to optimize the cooling cycle to enhance the hardening phase. Constant improvement and quality control guarantee for optimum performance.

PRODUCT INFORMATION

Production Technology	The EURODUR [®] Composite plates are produced with highalloyed filler wire in an OpenArc-welding process. A high share of carbid-alloyed elements in the filler wire, combined with our self developed cooling technology of our welding tables, guarantee for an optimized homogeneous distribution of hardening material in the coating area and a minimum mixture with the substrate material.
Technical Data	EURODUR [®] 3800 is an extremely highly wear resistant material which is unrivalled in its field due to its combination of features. It is warm still very hard and corrosive resistant. It can be used in applications with extremely high focus on abrasive wear resistance, together with the capability to withstand very high temperatures. Carbid material is very evenly distributed, therefore a secure protection over the whole area and thickness of the coating against wear is accomplished. Hard build-up welding according to DIN 8555.
Substrate to highly wear resistant coating	A highly efficient wear resistant surface welding is possible with varying substrates, form S235R2 up to highly-alloyed materials .
Material Thickness of base material	Standard thickness 6, 8, 10 mm – more upon request.
Dimensions (coated area)	Deliverable sizes: Small: 850 x 1850 mm Medium: 1100 x 2350 mm Large: 1350 x 2850 mm Special formats up to max. 1850 x 3800 mm upon request.
Coating thickness	Single Layer: 4 & 5 mm (for example 8 + 5 mm)
Coating hardness	At normal temperature (20°C) EURODUR [®] 3800 reaches a hardness of up to 67 HRC +/- 3. Operating Temperature up to 800°C. Hardness measurement with test piece DIN 32525-4.
Applications	Used if ultra high resistance against abrasive wear and highest temperatures are needed.
Examples of successful usage	Cyclones, slides, steel mesh guards, coolers, gliding plates, mixer, spiral conveyors (especially glass recycling industry)

ADDITIONAL COATING VARIANTS



The 45 degree orientation of the welding bead to the conveying direction induces only small wear. Welding toes as well as hardening cracks are directed at a 45 degree angle to the conveyor stream, protecting the component against wear.



Wearout during transportation of highly abrasive media is often evident at welding transitions. If high speed transportation of highly abrasive or very fine particles is needed, the welding in sine wave form should be preferred because it shows great advantages in reduced wear of the component.